4700 IN-LINE SLIDER / LIFT & SLIDE

SYSTEM

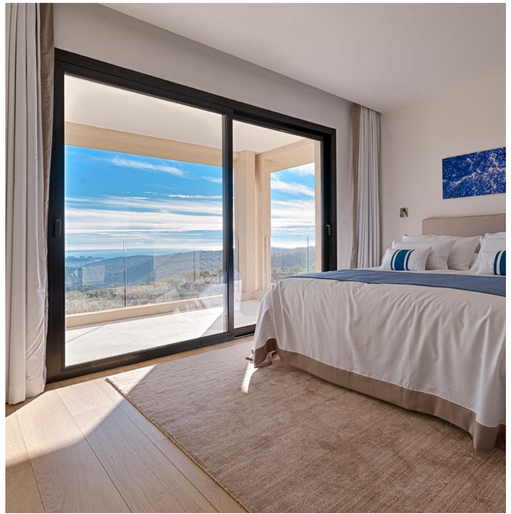

Sightlines

Frame depths 115 and 120 mm, 185 mm 3 rails

Interlock 47 mm

Polyamide strip length

20-25 mm

Profile thickness

Balcony door 1.5 mm

Glazing

Max. 36 mm, Min. 26 mm

Maximum sash dimensions

Width (L) 2,500 mm, Height (H) 3,000 mm

Maximum sash weight

Slide 280 kg

Lift & slide 300 kg

Consult maximum weight and dimensions according to typologies

CORTIZO

CORTIZO

4700 IN-LINE SLIDER / LIFT & SLIDE SYSTEM

CORTIZO

This sliding system, available both in-line slider and lift & slide versions, becomes an ideal solution for closing large spans. It presents modern aesthetics in straight lines, a reduced interlock section and large glazed surfaces that ensure bright and comfortable areas, due to its thermal and acoustic performance.

PAS24

- Up to 3 metres high
- Maximized glazed surface
- 47 mm interlock
- Faster manufacturing
- High security



* Available for 28 mm glazing only

BFRC Rating
kWh/(m²yr)

≥20	A ++
>10 to 20	A +
0 to <10	A
-30 to <0	B
-20 to <-10	C ✓
-30 to <-20	D
-50 to <-30	E

Double glazing

BFRC Rating
kWh/(m²yr)

≥20	A ++
>10 to 20	A +
0 to <10	A
-10 to <0	B ✓
-20 to <-10	C
-30 to <-20	D
-50 to <-30	E

Triple glazing

FEATURES

		Double glazing Uw ≥ 1.4 (W/m²K)	Triple glazing Uw ≥ 1.2 (W/m²K)
U-value (I)			
Acoustic insulation		Rw up to 40 dB	
Air permeability		Class 3* / 4**	
Watertightness		Class 7A	
Wind resistance		Class C5* / C2**	
Security test	PAS24	Passed	

Double glazing Ug=1.0 / Triple glazing Ug=0.7
(I) Two sashes 5 m x 3 m

In-line slider

Lift & slide

* Reference slide test 1.8 x 2.2 m / 2 sashes / ** Reference lift & slide test 4.0 x 2.50 m / 2 sashes
Security test: Reference test 2.40 x 2.40 m / 2 sashes

IN-LINE SLIDER



LIFT & SLIDE



47 mm INTERLOCK



100 mm INTERLOCK



DRAINAGE SOLUTIONS

Hidden drainage



250 mm subcill



HEAD EXTENSION - 38 mm

Double track



Triple track



OPENING POSSIBILITIES

Sliding
1 rail (1 sash + 1 fixed light)
2, 3 & 4 rails
In-pocket

POSSIBILITIES

ACCESSIBILITY