4900 HI SLIDING

SYSTEM

Sightlines

Frame 60, 70, 89, 120, 125, 130 mm

126, 145 mm 3 rails

201 mm 4 rails

Sash 48 mm

Polyamide strip length

34 mm

Profile thickness

Window 1.6 mm

Glazing

Max. 36 mm, Min. 24 mm

Maximum sash dimensions

Width (L) 2,200 mm

Height (H) 3,000 mm

Maximum sash weight

240 kg

Consult maximum weight and dimensions according to typologies

CORTIZO

CORTIZO

4900 HI SLIDING SYSTEM

CORTIZO

Standard sliding system with hinged features. Offers great thermal and acoustic performance favoured by a glazing capacity of up to 36 mm and a thermal break zone of 34 mm. It has a interlock section of 35 mm and straight lines, allowing the sashes to cross over thanks to the integrated handle with multilock system.

- High thermal & acoustic performance
- 35 mm interlock profile
- It allows the sashes to cross
- PRM low threshold

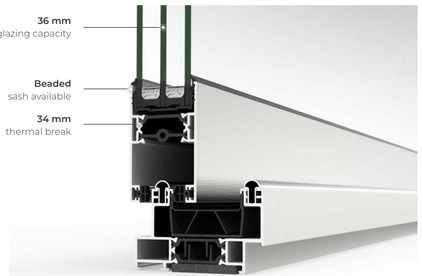

AVIS TECHNIQUE CC FAT

FEATURES		
U-value		Uw ≥ 1.2 (W/m²K)
Acoustic insulation		Rw up to 40 dB
Air permeability		Class 4
Watertightness		Class 7A
Wind resistance		Class C5

Reference test 1.80 x 2.20 m / 2 sashes
CSTB Laboratory DTA Certification

STANDARD BOTTOM CROSS SECTION



STANDARD LATERAL CROSS SECTION



PRM LOW THRESHOLD



HIDDEN DRAINAGE SOLUTION



OPENING POSSIBILITIES

POSSIBILITIES

ACCESSIBILITY

Sliding
1 rail (sash + fixed light)
2 and 3 rails
Pocket possibility
Possibility of 90° opening without mullion